

HASTINGS

INSTRUMENTS

THERMOCOUPLE GAUGE TUBES/SENSORS

FEATURES

- Corrosion-Resistant
- Non-Contaminating
- Stable Calibration
- Rugged Under Demanding Conditions
- Color Coded For Easy Identification

APPLICATIONS

- Refrigeration
- Vacuum Furnaces
- Freeze Drying
- Air Conditioning
- Pharmaceutical Production
- Cryogenics
- Accelerators
- Manufacture of Thermal Food Containers



Thermocouple Gauge Tubes




DV-6R-CF

DESIGN FEATURES

Hastings Thermocouple Gauge Tubes/Sensors are precision sensing devices designed to provide accurate measurement and control of vacuum. Fully compensated for both temperature and rate of temperature change, the tubes are renowned worldwide for their dependability, and boast a history of success that has endured for over 50 years.

Hastings Thermocouple Gauge Tubes/Sensors use the rugged but sensitive, time-tested Hastings thermopile sensor. Short, firmly connected thermocouples have no suspended weld to an external heater.

Thermocouple Gauge Pressure Ranges

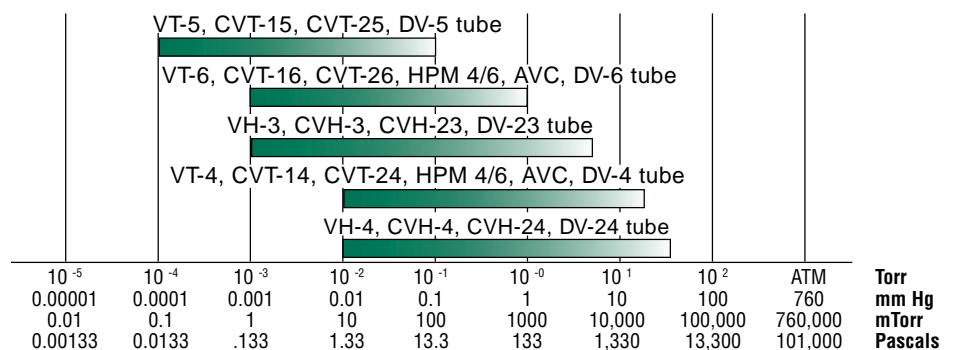

THERMOCOUPLE GAUGE TUBES/SENSORS

SELECTION CHART

(For proper accuracy and performance, Hastings Vacuum Gauges should always be used with the proper range of Hastings Vacuum Gauge Tubes.)

Instrument Series	Vacuum Range	Color Band*	1/8" NPT Standard Gauge Tube	1/8" NPT Ruggedized Tube	VCR® SS-4-VCR-3	1.33" CF™	KF-16	KF-25	1/8" NPT Stainless Shell	Glass 3/8" OD
VT-5, CVT-15/25	0-100 mTorr	Red	DV-5M	—	DV-5M-VCR	—	—	—	—	—
VT-6, CVT-16/26, HPM 4/6	0-1000 mTorr	Yellow	DV-6M	DV-6R	DV-6M-VCR	DV-6R-CF	DV-6M-KF-16	DV-6M-KF-25	DV-36	DV-20
VH-3, CHV-3/23	0-5 Torr	Orange	DV-23	—	DV-23-VCR	—	DV-23-KF-16	DV-23-KF-25	—	—
VT-4, CVT-14/24, HPM 4/6	0-20 Torr	Purple	DV-4D	DV-4R	DV-4D-VCR	—	DV-4D-KF-16	DV-4D-KF-25	DV-34	—
HVC-282	0-20 Torr	Blue	DV-273	—	—	—	—	—	—	—
VH-4, CVH-4/24	0-50 Torr	White	DV-24	—	—	—	DV-24-KF-16	DV-24-KF-25	—	—

*Note: Color band is not used on all tubes.

GAUGE TUBE TYPES

Standard Gauge Tube: Nickel-plated hermetically sealed base with glass, stainless steel, and nickel-plated components with color-coded base.

Ruggedized Gauge Tube: Nickel-plated hermetically sealed base with glass, stainless steel, and nickel-plated components.

Glass Gauge Tube: Constructed of Schott #8250 type glass. 10mm O.D. smooth tubulation.

Stainless Steel Gauge Tube: A weather-proof, corrosion-resistant tube which can withstand high temperatures as well as extremely high gas line over-pressurization.


VCR Gauge Tube: Includes female nut connection. 9/16-18 UNF, female threads with 0.75 hex, Cajon® #SS-4-VCR-3 and #SS-4-VCR-1.

KF-16 and KF-25 Gauge Tubes: Standard gauge tube with KF flanges. Simplifies installation while providing a reliable seal.


Conflat™ Flange Connection Gauge Tubes: Available for special vacuum configurations.

Hastings Instruments reserves the right to change or modify the design of its equipment without any obligation to provide notification of change or intent to change.


Standard




Ruggedized




KF-16
(KF-25 has a 1.57-in. base)




Glass

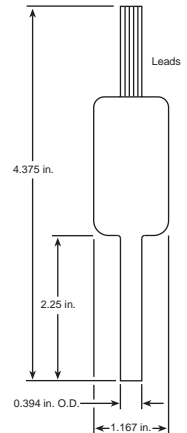

Stainless Steel
(threaded shown)



VCR



Cajon® is a registered trademark of Cajon Company.
VCR® is a registered trademark of Cajon Company.
Mini-Conflat™ is a trademark of Varian Associates, Inc.
Monel® is a registered trademark of Inco Alloys International, Inc.

Your Customer Service Representative



TELEDYNE
ELECTRONIC TECHNOLOGIES
Hastings Instruments
A Teledyne Technologies Company

Telephone: (757) 723-6531
Toll Free: (800) 950-2468
Fax: (757) 723-3925
World Wide Web: <http://www.hastings-inst.com>
E-mail: hastings_instruments@teledyne.com
P.O. Box 1436
Hampton, VA 23661